


Tubular Poles Static Technical Specification ←

Tubular Poles

AW2207 Tapered Poles

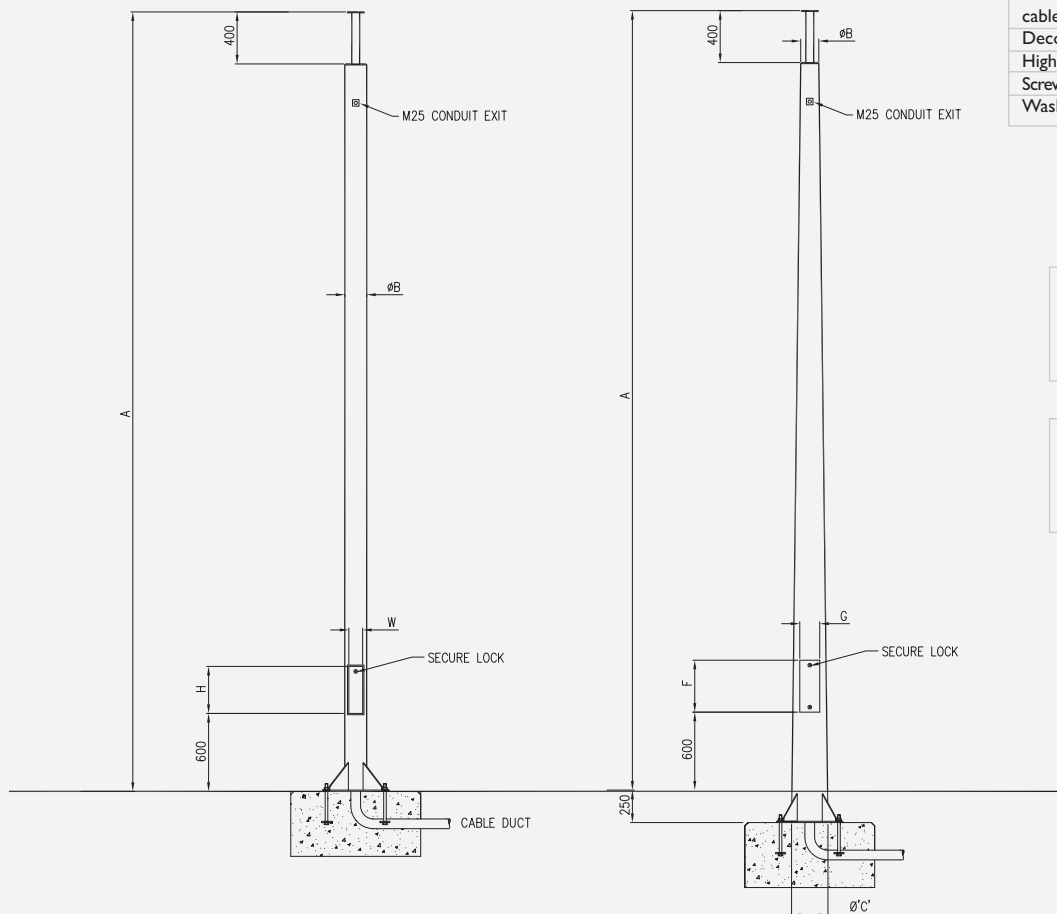

Options	PT No.
Access cover plate and cable restraining bar	/AC
Decorative banding	/B
High security locks	/HS
Screw in swan neck adaptor	/SN
Washer bottle conduit	/W

All camera mounting plates are DIA 127 with 8 No Ø 8.5 equi-spaced on 101.6 PCD. Ø 40 thro' column spacer

Poles complete with treated equipment mounting board inside compartment. Earthing lugs within pole and on door

FOR BASE DETAILS REFER TO PAGE 26

Tubular Poles Static & Tilt Down

Model No.	Height in metres A	Payload eqpt capacity kg	Max eqpt windload m ²	Duty Rating	Tube Ø B	Door aperture Size L x W	Base plate Size H	Holding down centres I	Holding down bolt size
AW1755/3	3	25kgs	0.25	Light duty	114	312 x 76	405 ²	350 ²	M16 x 200
AW1592/3		35kgs	0.4	Heavy duty	139	312 x 76	405 ²	350 ²	M16 x 200
AW1755/4		25kgs	0.25	Light duty	114	312 x 76	405 ²	350 ²	M16 x 200
AW1592/4	4	35kgs	0.4	Medium duty	139	312 x 76	405 ²	350 ²	M16 x 200
AW1507/4		50kgs	0.5	Heavy duty	168	362 x 106	405 ²	350 ²	M16 x 200
AW1592/5		25kgs	0.25	Light duty	139	312 x 76	405 ²	350 ²	M16 x 200
AW1507/5	5	35kgs	0.4	Medium duty	168	362 x 106	510 ²	450 ²	M20 x 300
AW1581/5		50kgs	0.5	Heavy duty	193	362 x 126	510 ²	450 ²	M20 x 300
AW1592/6		25kgs	0.25	Light duty	139	312 x 76	405 ²	350 ²	M16 x 200
AW1507/6	6	35kgs	0.4	Medium duty	168	362 x 106	510 ²	450 ²	M20 x 300
AW1581/6		50kgs	0.5	Heavy duty	193	362 x 126	510 ²	450 ²	M20 x 300
AW1507/7		25kgs	0.25	Light duty	168	362 x 106	510 ²	450 ²	M20 x 300
AW1581/7	7	35kgs	0.4	Medium duty	193	362 x 126	510 ²	450 ²	M20 x 300
AW1576/7		50kgs	0.5	Heavy duty	219	362 x 126	510 ²	450 ²	M20 x 300
AW1507/8		25kgs	0.25	Light duty	168	362 x 106	510 ²	450 ²	M20 x 300
AW1581/8	8	35kgs	0.4	Medium duty	193	362 x 126	630 ²	550 ²	M24 x 400
AW1576/8		50kgs	0.5	Heavy duty	219	362 x 126	630 ²	550 ²	M24 x 400
AW1581/9		25kgs	0.25	Light duty	193	362 x 126	630 ²	550 ²	M24 x 400
AW1576/9	9	35kgs	0.4	Medium duty	219	362 x 126	630 ²	550 ²	M24 x 400
AW1631/9		50kgs	0.5	Heavy duty	273	462 x 126	630 ²	550 ²	M24 x 400
AW1581/10		25kgs	0.25	Light duty	193	362 x 126	630 ²	550 ²	M24 x 400
AW1576/10	10	35kgs	0.4	Medium duty	219	362 x 126	630 ²	550 ²	M24 x 400
AW1631/10		50kgs	0.5	Heavy duty	273	462 x 126	630 ²	550 ²	M24 x 400
Model No.	Height In metres A	Payload eqpt capacity	Max eqpt windload m ²	Tube Ø at base Ø C	Tube Ø at top Ø B	Door aperture size L x W	Base plate size H	Holding down bolts centres	Holding down bolt size
AW2207/4	4	35kgs	0.4	187	114	360 x 132	405 ²	350 ²	M16 x 200
AW2207/5	5	35kgs	0.4	198	140	360 x 142	405 ²	350 ²	M16 x 200
AW2207/6	6	35kgs	0.4	249	140	360 x 150	510 ²	450 ²	M20 x 300
AW2207/7	7	35kgs	0.4	267	140	360 x 150	510 ²	450 ²	M20 x 300
AW2207/8	8	35kgs	0.4	285	140	360 x 150	510 ²	450 ²	M20 x 300

* Where payloads are greater than those stated above, please contact Altron