# Roof Mounted Brackets ←

## **Dome Mount Swivel Arm Brackets** SBI-RM/D Dome swivel arm roof mounted bracket Swivel arm length 1-2 metres M25 bushed Counterbalance cable entry weights (optional) 500 Fitting to suit dome Upstand 300 - 1200 employed specify post height when ordering Load capacity 35kgs Adjustable feet for levelling ballast frame

1000 - 1500

#### Arm Length Pt No. SBI-1000RMD lm I.2m SB1-1200RMD SBI-I500RMD

SBI-2000RMD

## Upstand Heights Available

- 300 mm (supplied as standard)
- 600mm
- 1100mm

Ballasting frame

available as bolt together (suffix

BD) for access

onto restricted

roof area

Other sizes made to order

- o Typical ballast amount 200 250kgs depending on arm length post height and location
- o Fittings provided for all dome types please specify when ordering
- Also available with bolt together frame (suffix BD) for access onto restricted roof areas

Stock items

Pt No.


### SBI-PM/D

Arm rotates in to

within roof space

service dome




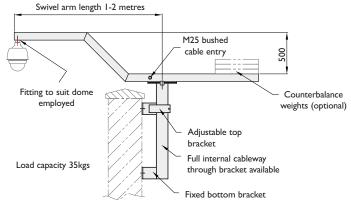


et Mount
● SBI-I000PMD
SBI-I200PMD
SBI-I500PMD
SB1-2000PMD
apet Mount
SBI-1000PMC/D
SBI-I200PMC/D
SBI-I500PMC/D
SBI-2000PMC/D

o Fittings provided for all dome types please specify when ordering SBI-PMC/D

Arm Length





Corner mount option