


→ Tubular Poles - Fixed & Tilt-Down Foundations & Bolting Details

Tubular Poles Fixed & Tilt Down

MODEL NO.	HEIGHT MTRS	BOLT CENTRES ¹ 2	BURIED DEPTH ² D	BASE PLATE SIZE ³ H ³ x B ³	SERVICE ENTRY SIZE	HOLDING DOWN BOLT SIZE D x L	FOUNDATION SIZES FOR THE UK						
							COUNTRY LOCATION			TOWN LOCATION			
							AREA A	AREA B	AREA C	AREA A	AREA B	AREA C	
AW1502 - lamp standard													
AW1502/4	4m	350	250	405	200	M16x245	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	
AW1502/5	5m	450	250	510	250	M20x325	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5	
AW1502/6	6m	450	250	510	250	M20x325	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	
AW1502/7	7m	450	250	510	250	M20x325	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	
AW1502/8	8m	550	250	630	250	M24x425	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	
AW1502/8HD	8m	550	250	630	250	M24x425	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7	
AW1502/10	10m	550	250	630	250	M24x425	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	
AW1502/10HD	10m	700	250	800	300	M27x600	1.6 x 1.6 x 0.8	1.7 x 1.7 x 0.9	1.8 x 1.8 x 0.9	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	1.7 x 1.7 x 0.9	
AW1502/12	12m	700	250	800	300	M27x600	1.6 x 1.6 x 0.8	1.7 x 1.7 x 0.9	1.8 x 1.8 x 0.9	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	1.7 x 1.7 x 0.9	
AW1502/15	15m	700	250	800	300	M27x600	1.9 x 1.9 x 1.0	2.0 x 2.0 x 1.0	2.1 x 2.1 x 1.0	1.8 x 1.8 x 0.9	1.9 x 1.9 x 1.0	2.0 x 2.0 x 1.0	
AW1859 - tubular tilt-down													
AW1859/4	4m	350		405	120	M16x245	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	
AW1859/5	5m	350		405	120	M16x245	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	
AW1859/6	6m	350		405	120	M16x245	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	
AW1859/7	7m	450		510	150	M20x325	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	
AW1859/8	8m	450		510	150	M20x325	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	
AW1859/10	10m	550		630	180	M24x425	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.5 x 1.5 x 0.75	
AW1859/12	12m	550		630	180	M24x425	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	1.7 x 1.7 x 0.9	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	
AW4460 - tubular tilt-down													
AW4460/4	4m	350		405	120	M16x245	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	0.8 x 0.8 x 0.4	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	
AW4460/6	6m	350		405	120	M16x245	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	
AW4460/8	8m	450		510	150	M20x325	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	
Tubular poles - Light Duty													
AW1755/4	4m	350		405	110	M16x245	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	0.8 x 0.8 x 0.4	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	
AW1592/5	5m	350		405	110	M16x245	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	
AW1592/6	6m	350		405	110	M16x245	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	
AW1507/7	7m	450		510	150	M20x325	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	
AW1507/8	8m	450		510	150	M20x325	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	
AW1581/9	9m	550		630	180	M24x425	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	
AW1581/10	10m	550		630	180	M24x425	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7	
Medium duty													
AW1592/4	4m	350		405	110	M16x245	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	
AW1507/5	5m	450		510	150	M20x325	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	
AW1507/6	5m	450		510	150	M20x325	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	
AW1581/7	7m	450		510	180	M20x325	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	
AW1581/8	8m	550		630	180	M24x425	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	
AW1576/9	9m	550		630	200	M24x425	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.5 x 1.5 x 0.75	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7	
AW1576/10	10m	550		630	200	M24x425	1.5 x 1.5 x 0.75	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	
Heavy duty													
AW1507/4	4m	350		405	150	M16x245	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5	
AW1581/5	5m	450		510	180	M20x325	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	
AW1581/6	6m	450		510	180	M20x325	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	
AW1576/7	7m	450		510	200	M20x325	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	
AW1576/8	8m	550		630	200	M24x425	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	
AW1631/9	9m	550		630	250	M24x425	1.5 x 1.5 x 0.75	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	
AW1631/10	10m	550		630	250	M24x425	1.6 x 1.6 x 0.8	1.7 x 1.7 x 0.9	1.8 x 1.8 x 0.9	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	1.7 x 1.7 x 0.9	
AW1631/12	12m	550		630	250	M24x425	1.8 x 1.8 x 0.9	1.8 x 1.8 x 0.9	2.0 x 2.0 x 1.0	1.7 x 1.7 x 0.9	1.8 x 1.8 x 0.9	1.9 x 1.9 x 1.0	
Tapered tubular poles													
AW2207/4	4m	350	250	405	150	M16x245	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	
AW2207/6	6m	450	250	510	200	M20x325	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	
AW2207/8	8m	450	250	510	200	M20x325	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	

Table dimensions in mm


Foundation sizes in table are W x W x D
Dimensions in metres






*D= 1000 on PM and buried
flange/embedded base models

REFER TO
INSTALLATION
METHODS ON
PAGES 104 - 106

GALVANISED HOLDING DOWN BOLTS



BURIED DEPTH BELOW GROUND LEVEL

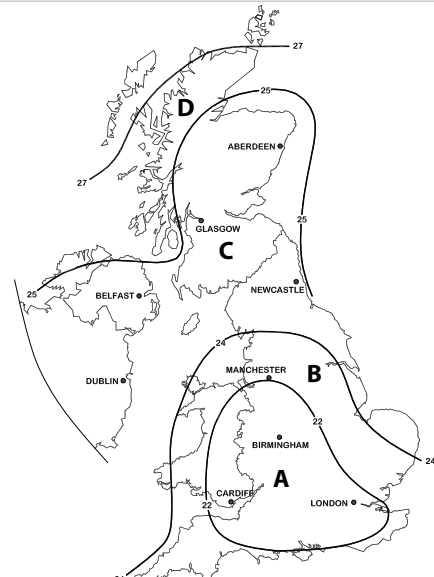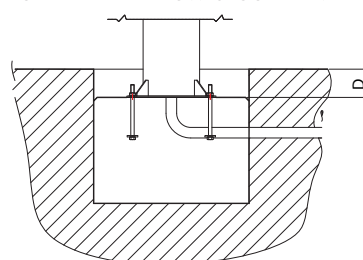

- For area D locations and exposed locations over 100m above sea level for areas A, B and 150m above sea level for area C, we recommend increased foundation sizes. Please refer to the table on page 101 for conformation of these.
- A minimum soil bearing capacity of 75 kN/m² is assumed.
- Foundation base dimensions are typical and may vary depending on site conditions.
- Please refer to the foundations & windloading section on pages 101-103 for further guidance.