



ACC


EB
Embedded Base




FB
Fixed Base

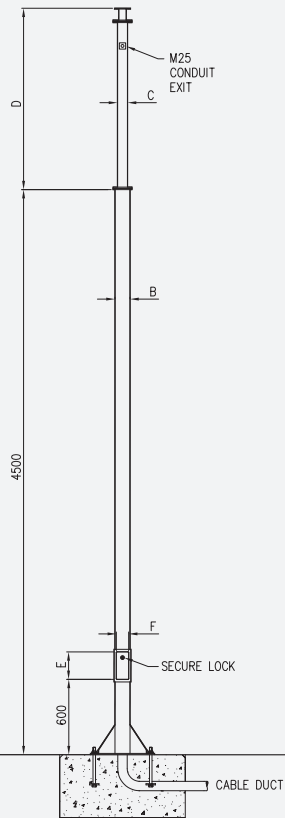

BP
Base Post

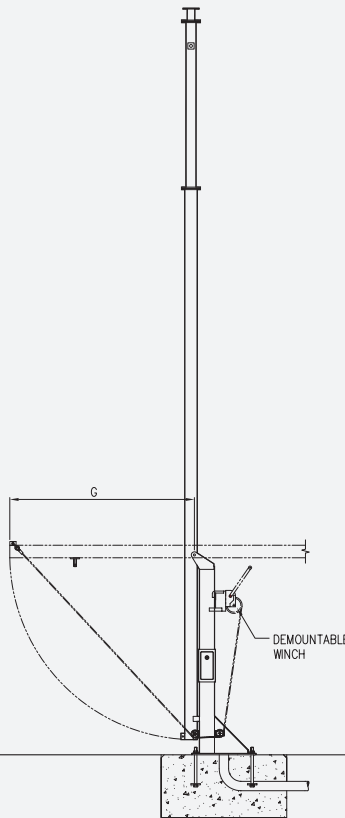

PM
Post Mounted

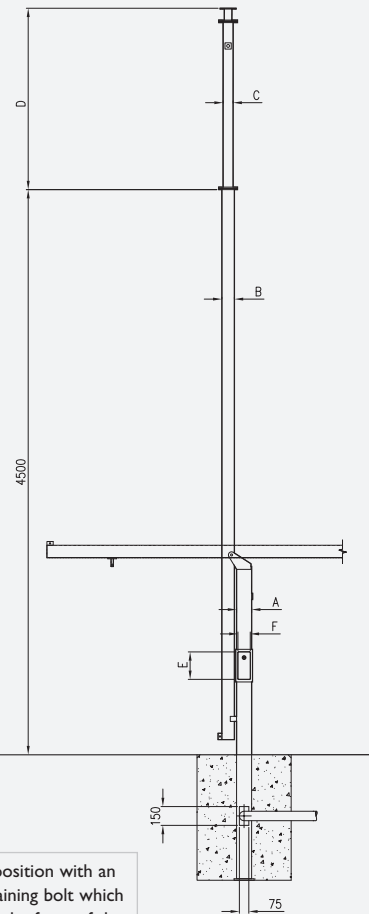

All camera mounting plates are DIA 127 with 8 No Ø 8.5 equi-spaced on 101.6 PCD. Ø 40 thro' column spacer

Tilt down columns are fixed in the vertical position with an M20/M24 nut screwed onto the column retaining bolt which enters into the secure access hatch through the front of the post. This is then padlockable to stop unauthorised tilting.

FOR BASE DETAILS
REFER TO PAGE 18

Model No.	Height in metres	Payload eqpt capacity *	Max eqpt windload m²	Post type **	Post size A	Lower section B	Mid section B2	Upper section C	Extension length D	Holding down bolt centres I **	Holding down bolt size	Base plate size H **	Door height E	Door width F	Column rear clearance when tilting G	Winch	
ACCI Standard Duty	4.5	35kgs	0.3m²	FB/EB	-	100x100	-	-	-	350²	M16x200	405²	205	90	-	N/A	
		35kgs	0.3m²	PM	120x120	100x100	-	-	-	-	-	-	285	110	1700	DW1000/AC	
		35kgs	0.3m²	BP	120x120	100x100	-	-	-	450²	M20x300	510²	285	110	1700	DW1000/AC	
ACC2 Standard Duty	6	35kgs	0.25m²	FB/EB	-	120x120	-	90x90	1500	450²	M20x300	510²	205	110	-	N/A	
		35kgs	0.25m²	PM	120x120	100x100	-	80x80	1500	-	-	-	285	110	1700	DW1000/AC	
		35kgs	0.25m²	BP	120x120	100x100	-	80x80	1500	450²	M20x300	510²	285	110	1700	DW1000/AC	
ACC2HD Heavy Duty	6	50kgs	0.4m²	FB/EB	-	150x150	-	100x100	1500	450²	M20x300	510²	285	140	-	N/A	
		50kgs	0.4m²	PM	120x120	120x120	-	90x90	1500	-	-	-	285	110	1700	DW1000/AC	
		50kgs	0.4m²	BP	120x120	120x120	-	90x90	1500	450²	M20x300	510²	285	110	1700	DW1000/AC	
ACC3 Standard Duty	7.5	35kgs	0.25m²	FB/EB	-	150x150	-	100x100	3000	450²	M20x300	510²	285	140	-	N/A	
		35kgs	0.25m²	PM	150x150	120x120	-	90x90	3000	-	-	-	335	140	2000	DW1500/AC	
		35kgs	0.25m²	BP	150x150	120x120	-	90x90	3000	550²	M24x400	630²	335	140	2000	DW1500/AC	
ACC3HD Heavy Duty	7.5	50kgs	0.4m²	FB/EB	-	200x200	-	120x120	3000	550²	M24x400	630²	335	185	-	N/A	
		50kgs	0.4m²	PM	150x150	150x150	-	100x100	3000	-	-	-	335	140	2000	DW1500/AC	
		50kgs	0.4m²	BP	150x150	150x150	-	100x100	3000	550²	M24x400	630²	335	140	2000	DW1500/AC	
ACC4 Standard Duty	9	25kgs	0.25m²	FB/EB	-	150x150	-	100x100	4500	550²	M24x400	630²	285	140	-	N/A	
		25kgs	0.25m²	PM	150x150	150x150	-	100x100	4500	-	-	-	335	140	2000	DW2500/AC	
		25kgs	0.25m²	BP	150x150	150x150	-	100x100	4500	550²	M24x400	630²	335	140	2000	DW2500/AC	
ACC4HD Heavy Duty	10	35kgs	0.4m²	FB/EB	-	200x200	-	150x150	4900	550²	M24x400	630²	335	185	-	N/A	
		35kgs	0.4m²	PM	200x200	200x200	-	150x150	4900	-	-	-	335	185	2400	DW2500/HD/AC	
		35kgs	0.4m²	BP	200x200	200x200	-	150x150	4900	700²	M27x600	800²	335	185	2400	DW2500/HD/AC	
ACC12	12	25kgs	0.25m²	PM	200x200	200x200	150x150	100x100	4900	2000	-	-	-	335	185	2400	DW2500/HD/AC
		25kgs	0.25m²	BP	200x200	200x200	150x150	100x100	4900	2000	700²	M27x600	800²	335	185	2400	DW2500/HD/AC
ACC15	15	25kgs	0.25m²	PM	200x200	200x200	150x150	100x100	5000	5000	-	-	-	335	185	2400	DW2500/HD/AC
		25kgs	0.25m²	BP	200x200	200x200	150x150	100x100	5000	5000	700²	M27x600	800²	335	185	2400	DW2500/HD/AC

* Where payloads are greater than those stated above, please contact Altron

** EB Version is directly embedded